

GRAU

Niceone

Niceone ist die minimale Pendelleuchte. Die konische Form fließt perfekt in die optische Linse, die das Licht entblendet. Preisgekröntes Design, feinste Finishes und brillante Lichtstimmung – made in Germany.

Warm Dim passt beim Dimmen die Lichtfarbe automatisch an. Dimme das Licht per Drehdimmer oder GRAU App.

Designed und gefertigt am GRAU Campus in Deutschland.

Farben

Farben	Artikelnummer
Polished/Grey	NOU1-310-99
Raw/Charcoal	NOU1-310-95
White/White	NOU1-310-01
Black/Black	NOU1-310-00

Dimensionen

Fixture
ø 7 cm × 16,3 cm



Height
200 cm

Head
ø 4 cm × 31 cm

Body

Pendellänge	2m
Maße Verpackung (L x B x H)	80cm x 21cm x 10cm
Material	Aluminium
Oberfläche	Pulverbeschichtet
Gewicht	1kg
Gewicht inkl. Verpackung	1,5kg
Montageart	Deckenaufbau
Nennspannung	220–240V
Leistungsaufnahme	11W
Leuchteneffizienz	56lm/W
Anschlussleitung (Ader-Zahl)	3
Schutzklasse	I
Artikelnummer	CNO00-1

Licht

Leuchtmittel	LED
Leuchtenlichtstrom	620lm
Farbwiedergabeindex	CRI >90
Lichtaustritt	Direkt
Abstrahlwinkel	54°
Lichtverteilung	Symmetrisch
Farbtemperatur	2700–2200K
Lichtfarbe	Warmweiß
Dimmbar	Ja
Art der Dimmung	Phasenabschnitt
Warm Dim	Ja
GRAU App Upgrades möglich	Ja
Umbau auf DALI möglich	Ja

Niceone

Niceone is the minimal pendant luminaire. Its conical shape flows perfectly into the optical lens, which reduces glare. Award-winning design, the finest finishes and brilliant mood lighting – made in Germany.


Warm Dim automatically adjusts the light color when dimming. Dim the light using a rotary dimmer or the GRAU app.

Designed and manufactured at the GRAU Campus in Germany.

Colors

Colors	SKU
Polished/Grey	NOU1-310-99
Raw/Charcoal	NOU1-310-95
White/White	NOU1-310-01
Black/Black	NOU1-310-00

Dimensions

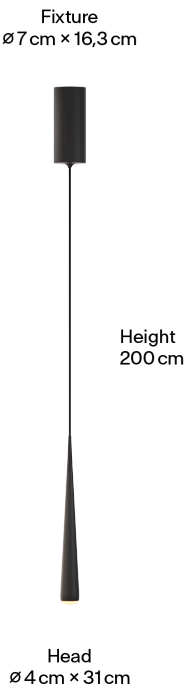

Body

Pendant length	2m
Packaging dimensions (L x W x H)	80cm x 21cm x 10cm
Material	Aluminum
Surface	Powder-coated
Weight	1kg
Weight incl. packaging	1,5kg
Mounting type	Ceiling-mounted (surface)
Rated voltage	220–240V
Power consumption	11W
Luminaire efficiency	56lm/W
Connection cable (number of cores)	3
Protection class	I
SKU	CNO00-1

Light

Light source	LED
Luminous flux	620lm
Color rendering index	CRI >90
Light emission	Direct
Beam angle	54°
Light distribution	Symmetric
Color temperature	2700–2200K
Light color	Warm White
Dimmable	Yes
Type of dimming	Trailing edge
Warm Dim	Yes
GRAU App upgrades possible	Yes
Conversion to DALI possible	Yes